




ARF-WL8-IO1*

Wireless single input / output module

The single input / output module is used to provide one monitored input and one voltage free NC / NO relay output.

FEATURES:

- Bi-directional wireless communication
- Battery power supply
- Self-optimizing wireless frequency and amplitude algorithms
- IP65 enclosure
- M16/M20 break-out holes for cable entries
- Operating temperature range: -10 °C to +55 °C

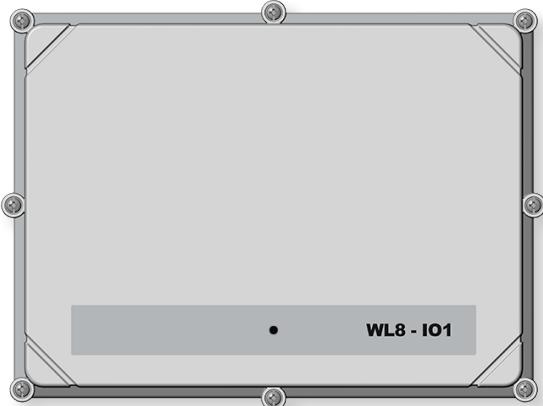

* Not certified to EN54